TARGHE DUAL PRO



Informazioni utili

Le seguenti indicazioni hanno lo scopo di guidarvi nella corretta creazione dei file di stampa. Sul nostro sito sono disponibili ulteriori informazioni a riguardo.

Domande & Supporto

Sul nostro sito troverete suggerimenti e supporto in merito ai prodotti offerti. Naturalmente potrete avere la nostra consulenza diretta chiamando il nostro servizio clienti.

INVIA FILE IN QUADRICROMIA, IN CASO DI FILE IN RGB VERRANNO AUTOMATICAMENTE CONVERTITI

FORMATI COMPATIBILI EPS, PDF, PSD, AI

Informazioni generali per l'utilizzo di un programma grafico

- è necessario disporre di un programma grafico (guale ad es. Adobe InDesign, Adobe Illustrator, CorelDraw, Adobe Photoshop)
- · programmi office per l'elaborazione di immagini non sono idonei per produrre file di stampa utili a questo tipo di prodotto



o pdf









in formato PSD

PHOTOSHOP Creare un file a risoluzione 300 DPI, convertire i testi in curve di livello e inviare



INDESIGN Create un nuovo file, selezionate i testi e create i profili in curve di livello. Esportate in Pdf/x-1a:2001

Significato dei simboli del template

ezionate tutto il contenuto e conver-

titelo in curve di livello, esportate in eps

per una corretta esecuzione di stampa vi preghiamo di progettare il vostro file seguendo il nostro lavout. Tenere conto di tolleranze di taglio di fino a 1 mm. Creare i file senza indicatori né caratteri ausiliari.



Formato finale: formato / misura del prodotto finito



Elementi di sfondo (colori / immagini / grafici / bianco) devono essere creati oltre il bordo del formato finito. Mantenersi non oltre la linea azzurra




Area coperta dal distanziatore

Importante requisiti delle informazioni

create il vostro file solo dopo aver scaricato il template con la forma della targa desiderata. Normalmente i template si possono scaricare dopo aver cliccato su: carica ul tuo design (vedi immagine)





> MARGINE LIMITE TESTI . Collocare i caratteri e le informazioni importanti (ad es. loghi, indirizzi, testi) ALL'INTERNO DEL RIQUADRO MAGENTA. > RISOLUZIONE almeno 100 dpi insegne superiori a 1mg e 300 dpi per i formati inferiori.

- > MODALITÀ COLORI CMYK, FOGRA39 (ISO Coated v2)
- > NON CORREGIAMO errori di ortografia e sintassi ed eventuali impostazioni di sovrastampa

Con verifica professionale

Se è stata selezionata l'opzione "verifica professionale", viene controllato se il file è idoneo alla stampa. Il procedimento mediante nostro operatore prevede: controllo della risoluzione dpi, verifica margini di sicurezza e distanza degli elementi grafici dal bordo. LE INVIEREMO UN FILE CON ANTE-PRIMA GRAFICO DA APPROVARE. La verifica professionale causa un leggero ritardo della produzione sulla base dei tempi prescelti.


Con verifica standard

La produzione viene avviata automaticamente senza previo controllo. I dati senza refilo o con smarginatura bianca vengono adeguati automaticamente, se possibile. Non possiamo pertanto escludere una modifica del layout (ad es. messa in scala o distorsione).

• TARGHE DUAL PRO



Gestione del bianco parziale di sfondo o coprente

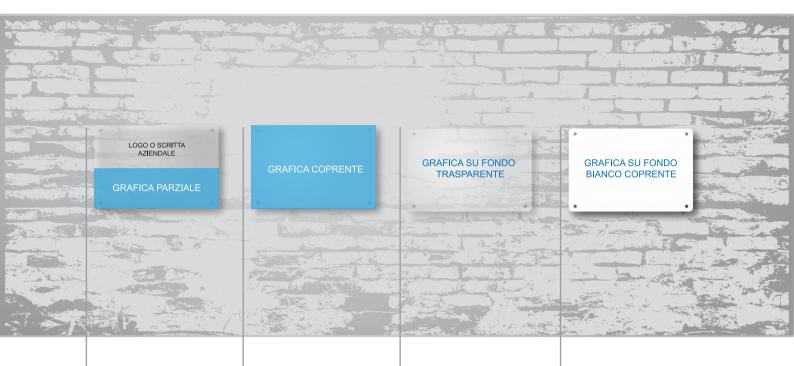

La grafica coprirà una porzione di targa lasciando inalterata la trasparenza dell'acrilico sull'altra parte. La trasparenza dell'acrilico viene oscurata dalla grafica, che coprirà la sua intera superfice. Soluzione ideale per esaltare la trasparenza dell'acrilico facendo trasparire il retro del muro. Soluzione ideale per chi desidera nascondere il retro del muro con un fondo bianco coprente

Esempio Grafiche con bianco p

Grafiche con bianco parziale



Esempio Grafiche con bianco coprente



fig.2

fig 1

Trasparenza o colore pieno del plexiglass

Indicare nel vostro file le zone che dovranno essere stampate, inserendo semplicemente la vostra grafica all'interno del template scaricato.

Guida alla gestione del bianco parziale di sfondo o coprente

a) Bianco Parziale

La stampa del bianco parziale è inclusa di serie su tutte le nostre targhe e insegne in plexiglass, li dove saranno presenti zone di colore CMYK, automaticamente verrà inserito il bianco dietro queste.

b) Bianco Coprente

Per specificare un fondo coprente su tutta la lastra è indispenspensabile inserire UN RIQUADRO pari alla grandezza del template scelto, di colore bianco (C=0 M=0 Y=0 K=0) sotto tutti i livelli.

DUAL PRO SIGNS



Information

The following guidelines are meant to guide you in the proper creation of print file. On our site more information about this are available.

Question and support

On our site you will find helpful information and advice about the products offered. Of course, you will have our direct advice by calling our customer service.

SEND FILE IN FOUR-COLOUR PROCESS (CMYK) IN CASE OF FILE IN RGB WILL AUTOMATICALLY CONVERTED.

COMPATIBLE FORMATS EPS, PDF, PSD, AI

General information for the use of a graphical program

- · you must have a graphics program (for ex. Adobe InDesign, Adobe Illustrator, CorelDraw, Adobe Photoshop)
- · "office" programs for the image processing are not suitable to produce print files useful for this type of product







Select all the content and convert it to outlines, export to EPS or PDF

ILL USTRATOR Select all the content and convert it to outlines, export to AI or PDF for illustrator



нотознор Create a 300 DPI resolution files, convert texts to outlines and send in PSD format



INDESIGN Create a new file, select the text and create profiles in outlines. Exported to Pdf/x-1a:2001

Meaning of the template symbols

for proper printing execution please design your life by following our layout.

take into account cutting tolerances of up to 1mm. Create files without indicators or auxiliary characters.





Final format: format / size of the finished product



Background elemnts (colors / images / graphics / white) need to be created over the edge of the finished format. Not remain beyond the blue line


Limit of text margin



Important information requirements

Just create your file after downloading the template with the shape of the license plate you want. Normally templates can be downloaded after clicking on: upload your design (see image)





- > TEXT MARGIN LIMIT. Situate important fonts and information (ex. logos, addresses, texts) INSIDE THE MAGENTA BOX.
- > RESOLUTION At least 100 dpi for signs over 1mg and 300 dpi for lower formats.
- > COLOR MODES CMYK, FOGRA39 (ISO Coated v2)
- > WE DON'T CORRECT spelling and syntax errors or any overprint settings

Professional check

If the "professional check" option is selected, it is checked if the file is suitable for printing. The process with uor operator provides: dpi resolution control, security margins check and distance of graphic elements from the border. WE WILL SEND YOU A GRAPHIC THUMBNAIL FILE TO APPROVE. The professional check causes a slight delay in production on the basis of the times chosen.


Standard check

Production is started automatically without control. Data without bleed or with bleed tolerance are adjusted automatically where possible. We can't exclude a layout change (ex. scaling or distortion).

DUAL PRO SIGNS




White management partial background or covering

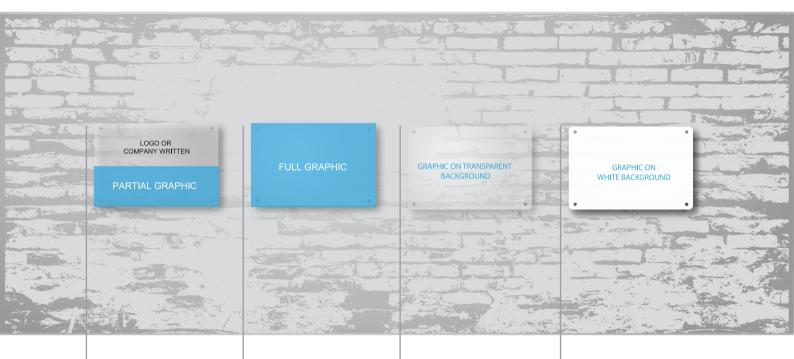


The graphic will cover a portion of the plaque, leaving transparency in the other part of the acrylic glass. The acrylic transparency is obscured by the graphics that will cover its entire surface. Ideal solution to enhance the transparency of the acrylic and thus make visible the back of the wall. Ideal solution for those who want to hide the back of the wall with a white background.

Example Graphics with partial white



Example

Graphics with covered white



Transparent or full color of the plexiglass

indicate in your file areas that will not be printed, simply inserting your graphics into the downloaded template.

Guide to manage partial or covered white background

a) Partial White


Partial white printing is standard on all our plexiglass plates and advertising signs, where CMYK color areas will be present, The white behind them will automatically be inserted.

b) Covered White

To specify a covering surface on the whole slab, it is essential to insert a BOX equal to the size of the template chosen, of white color (C = 0 M = 0 Y = 0 K = 0) under all levels.





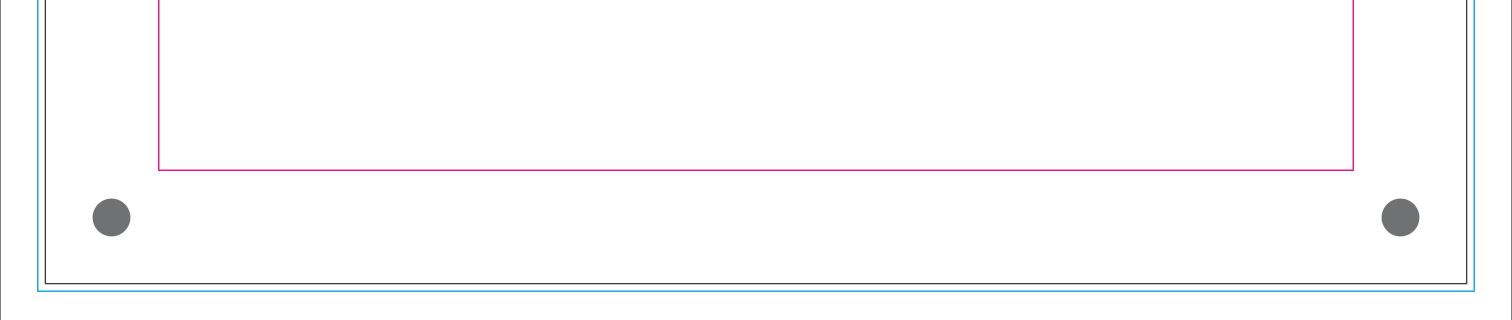











inventivashop.com





